

NEW PRODUCTS!

SH446 TRUE 5000 PSI 4 WIRE

WP 350 BAR - 5000 PSI


| HOSE TYPE | Ø HOSE | | | REINFORC. DIAMETER | | OUTSIDE DIAMETER | | WORKING PRESSURE | | BURST PRESSURE | | BEND RADIUS | | WEIGHT | |
|-----------|--------|------|------|--------------------|-------|------------------|-------|------------------|-------|----------------|-------|-------------|-------|--------|---------|
| | DN | INCH | SIZE | [mm] | [in] | [mm] | [in] | [bar] | [psi] | [bar] | [psi] | [mm] | [in] | [kg/m] | [lb/ft] |
| SH446-32 | 51 | 2" | 32 | 63,2 | 2,488 | 68,1 | 2,681 | 350 | 5000 | 1200 | 17400 | 700 | 27,56 | 4,73 | 3,18 |



-40 °F TO +212 °F OCCASIONAL PEAKS UP TO +250 °F

HIGH PRESSURE HYDRAULIC SYSTEM WITH EXTREME HIGH PRESSURE PEAKS FOR USE WITH PETROLEUM AND WATER-GLYCOL BASE FLUIDS, LUBRICANT OILS AND WATER

CALL FOR PRICING

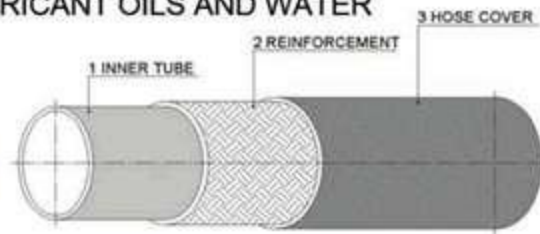

16k for the price of 12k!



Selblast 4+ WATERBLAST



-10°C / + 70°C
+14°F / +158°F

Max. -40°C / +100°C
Max. -40°F / +212°F

| ID | | ROD | | OD | | WP | | BP | | BR/r | | W | | L | |
|-----------|------|------|------|------|------|-------|------|-------|-----|------|-----|---|--|---|--|
| Dash Size | inch | mm | mm | mm | bar | psi | bar | psi | mm | g/m | m | | | | |
| -08 | 1/2" | 12.7 | 21.6 | 24.6 | 1100 | 15950 | 2750 | 39870 | 230 | 1215 | > 3 | | | | |

- TUBE : MINERAL, VEGETABLE, AND GLYCOL BASED HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.
- REINFORCEMENT : 4 HIGH TENSILE STEEL SPIRAL.
- COVER : HYDRAULIC OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER
- APPLICATION : VERY HIGH PRESSURE HOSE FOR WATER SCALING AND JETTING SYSTEMS.

The Hose Guys, Inc.

(949)940-1700 (949) 940-1708 fax

1325 Calle Avanzado San Clemente, CA 92673

www.thehoseguys.com